

# COMPACT VARIABLE SPEED DRIVE SYSTEM FOR INDUSTRIAL APPLICATIONS

*Ioan-Adrian VIOREL – Loránd SZABÓ – Radu-Cristian CIORBA*

Technical University of Cluj  
Department of Electrical Machines  
3400 CLUJ, P.O. Box 358, Romania  
Phone: +40 64 195 699 / Fax: +40 64 192 055  
e-mail: Ioan.Adrian.Viorel@mae.utcluj.ro;  
Lorand.Szabo@mae.utcluj.ro;  
Radu.Ciorba@mae.utcluj.ro;

## ABSTRACT

Variable speed drives serve an important function in several industrial applications. They match motor torque and speed to the load, saving energy when load requirements are reduced. The best way to reduce the speed of an induction motor is by feeding it from a variable frequency electronic power converter. In recent years a tendency of integrating the motor and its frequency converter into a single unit could be observed. A prototype of such a compact variable drive system will be presented in this paper.

## 1. INTRODUCTION

There is currently great interest in adding variable speed capability to motorised appliances and products, which were operated at fixed speed in the past. The reasons include the increasing cost of energy as well as the extra value customers place on the variable speed feature.

Several industrial processes require variable speeds. Adjustable speeds can optimise a process to save energy and obtain utility company rebates, for example in many fan and pump applications, where the application requires speed trimming, respectively controlled starting and stopping. These operations require high precision speed or torque control [1].

Variable speed drives are also common in heating, ventilation and air conditioning applications. In these cases variable speed operation makes simple to slow down the fan when air demand is lower, in order to reduce electricity use in a facility. The output of such equipment can be varied by changing motor speed or by using dampers and reducing valves with constant speed motors. Dampers and reducing valves waste energy. Another typical application of variable speed drives is in pump control, where the variable speed control can help protect equipment during high or low volume operation. Such industrial applications are numerous and also include conveyor control, where variable speed operation makes simple to co-ordinate conveyor velocity with desired production rate.

In the past, varying the speed of an induction motor was achieved using techniques such as multiple winding motors, variable transformers, or triac drives. In general, none of these techniques is ideal for industrial applications and as a result, variable speed drives were used more in appliances.

The best way to reduce the speed of an induction motor is by feeding it from a variable frequency electronic power converter (inverter) that converts constant frequency a.c. power input into a variable frequency output. Thus the motor speed varies in proportion to the drive output frequency. In addition to providing speed control, the variable speed drive system provides soft starting, whereby a motor starts slowly and then speeds up. This reduces the mechanical stress on both the motor and equipment driven by the motor.

The simplest speed variation possibility is the employing the so-called V/F drive technique, which maintains the flux level in the induction motor constant by varying both the voltage and frequency of the applied voltages in proportion, allowing speed to be varied over a wide range [2].

Savings by using the variable speed drives are considerable. For example for fans and pumps the power consumed is proportional to the cube root of shaft speed. If the speed is reduced by 10%, the flow is also reduced by 10%, while power consumption is reduced by 27%. If speed is reduced by 20%, the power is reduced by 49%. Compared to throttling as a means of flow control, speed reduction provides dramatic energy savings.

## 2. COMPACT VARIABLE SPEED DRIVES


Until recently the electric motors and their control electronics were operated in separate locations, connected by often lengthy and costly wiring for power, control, and communication. Electronic controls generally reside in safer, cooler, and more centralised enclosures, while motors face more severe conditions of temperature, humidity, vibration, dust, washdown cleaning, and more, found in the industrial world [3].

In the last decade, however, the two technologies converged and time became right to unify the motors and their drive systems. The new compact drive system combines within a single unit an ac motor (in most of the cases an induction motor), an integrated frequency converter, and an EMC filter, which prevents harmonics from affecting the service life of the motor and drive.

These compact systems goes under a variety of names in the literature (smart motors, variable-speed motors, integral motors, integrated motors, integrated motor drives, etc.). Their market share is in expansion and also their power range. In present typical value of the maximum power of such a compact drive system is 7.5 kW [4].

The compact variable speed drives has several advantages over the drive units built up separately from individual items:

- lower installed system cost (wiring, installation, and panel space or special electrical control rooms savings)
- short motor leads eliminate standing wave  $dv/dt$  failures and reflected voltage spikes
- possibility of built-in prevention of voltage peaks at the motor terminals
- optimum motor-inverter match

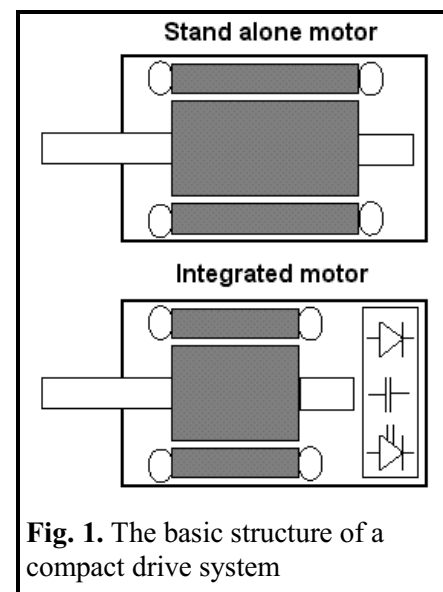

- no design problems with motor-inverter rating, filters or power cable length
- guaranteed electromagnetic compatibility
- possibility of promoting decentralized control architectures, etc.

Heating effects are the greatest enemy of these compact drive systems. Both the motor and frequency converter produce heat. As a result, thermal management of these integrated drive systems must be made with maximum attention. Optimised design of mechanical and structural components, heat sinks, cooling, and the layout of elements can contribute to the ideal solution.

As it was mentioned above, in the present the 7.5 kW output power represents a practical plateau above which heating effects build up significantly. Therefore very few commercially available products exist over this power limit. Drive units of larger power should require more complex designs and impact product costs.

The speed at which the motor runs affects thermal management. At significant speeds, the motor-shaft-driven fan provides substantial cooling, but becomes inadequate at low speeds. This usually means adding a separate constant-speed blower to the compact drive system [4].

Vibrations and electromagnetic interference (EMI) are some other environmental considerations for integrated motor-drives. The vibrations, shocks and electromagnetic emissions of the induction motor may affect the electronics.

Cost considerations for the compact drive systems aren't simple either. Depending on size, a typical motor/drive package carries a premium on initial cost compared to an individual motor and drive. A rugged housing, thermal management, close-coupled wiring, and the special environmental design just mentioned all add to cost. Typical premiums today are in the 15÷20% range. But for a total installed system, cost of the integrated design seems to be lower [4].

### 3. PROTOTYPE OF A COMPACT VARIABLE SPEED DRIVE

The specialists of the Electrical Machines Department, Technical University of Cluj and FROSys Ltd. Cluj built up a prototype of a compact variable speed drive system with an induction motor.

As in the first stage the prototype was made especially for experimental purposes, the simplest technical solutions were adopted.

The starting point was a commercially available induction motor (of 3MA 100L type produced by S.C. IAME S.A. Sf. Gheorghe, Romania). Its main characteristics are included in Table I.

This motor was redesigned to meet the requirements of an inverter fed induction motor [5-6]. The voltage waveform produced by an inverter must be taken into account, because it differs from the relatively pure sinusoid provided by the a.c. line. At such

Item	Value
Rated power	2.2 kW (3 hp)
Rated speed	1420 r/min
Rated current	5.29 A at 400 V
Rated power factor (cosφ)	0.80
Efficiency	79 %

**Table I.** The main characteristics of the initial induction motor

a waveform the performance of the motor is different. The inherent voltage spikes may affect the motor's insulation. An other phenomenon to be considered is that load combination at variable speed differs from that at rated speed.

In the next step the original induction motor was modified at FROSys Ltd. Cluj upon its new design instructions.

The frequency converter most suited for this application was found the Siemens's MICROMASTER Integrated MI220/3 type (Siemens code 6SE9615-8DD10ZC87) [7]. This was fixed on the top of the motor.

Very short internal connections were needed between the induction motor and its frequency converter.

Two views of the assembled compact variable speed drive system are shown in figure 2.



**Fig. 2.** The compact variable speed drive's prototype

The speed of the above presented compact drive system can be modified in several ways:

- Manually from the built-in control potentiometer
- Manually from an external potentiometer disposed on a control panel
- Manually from an auxiliary Clear Text Display Module (of OPm2 type)
- In automatic mode upon a user defined built in speed profile
- In automatic mode controlled from a higher level control unit via RS232 interface or PROFIBUS-DP serial bus

#### **4. EXPERIMENTAL RESULTS**

The built up prototype of the compact variable speed drive system with induction motor was tested on a high performance test bench. The mechanical part of the bench contains two mechanically coupled electric motors, a PC computer controlled rectifier (SIMOREG) fed d.c. motor for breaking and loading purposes and the motor to be tested. Sensors of LEM measure the voltages and currents and give signals to the data acquisition unit. The measurement part of the bench consists of a usual Pentium processor based PC having a National Instruments AT-MIO-16XE-10 type acquisition board. This delivers high performance and reliable data acquisition capabilities, having 1.25 MS/s sampling rate, 16



single-ended analogue inputs. It features both analogue and digital triggering capability, as well as two 12-bit analogue outputs, two 24-bit, 20 MHz counter/timers and eight digital I/O lines. The electrical signals generated by the transducers are optimised for the input range of the DAQ board. The SCXI 1140 type signal conditioning accessory amplifies the low-level signals, and then isolates and filters them for more accurate measurements.

Several programs written in LabVIEW 6i co-ordinate all the data acquisition and the test measurement processes. This is a powerful graphical programming development for data acquisition and control, data analysis, and data presentation [8].

LabVIEW gives the flexibility of a powerful programming language without the associated difficulty and complexity because its graphical programming methodology is inherently intuitive to the users. The final processing of the measured data was made in MATLAB 6 [9].

Various tests were made with the compact variable speed drive system at different loads: starting, stopping, reversing, speed modification, etc. The thermal checking of the drive system was also made.


The lowest frequency at which the drive system could move was of 0.3 Hz. This means a speed of 7 r/min. In figure 3 the plots of the measured currents at this speed in steady-state regime are shown. The current waveforms at reversing the motor from +800 r/min to -800 r/min are given in figure 4.

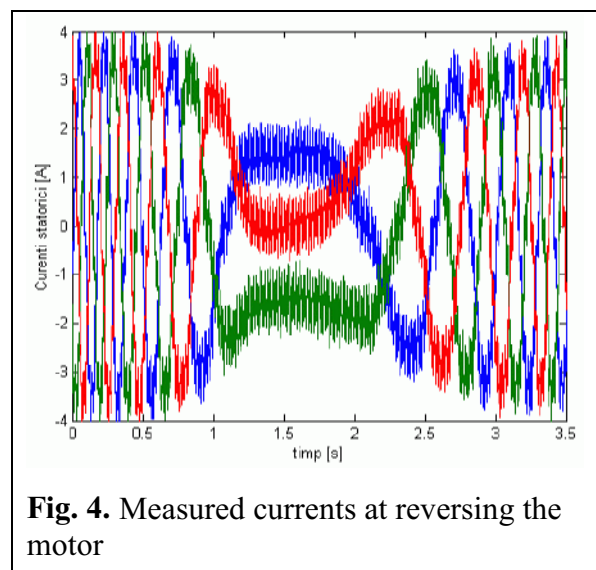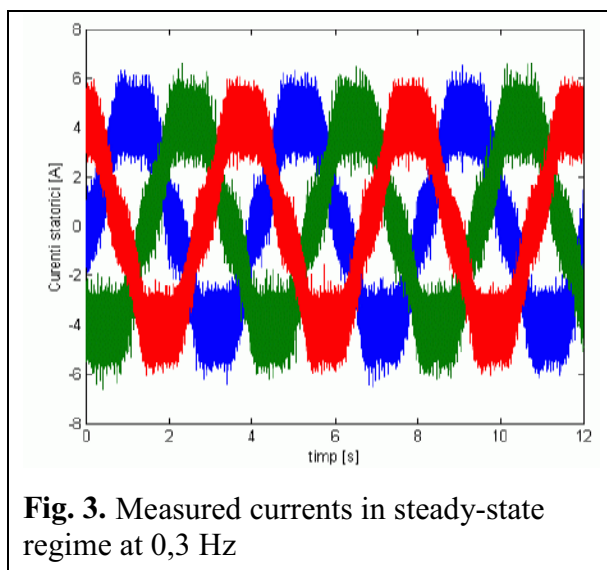


For the thermal checking of the motor a temperature probe was built in the motor on its stator windings. The probe was connected to the frequency converter at its TB1 input. This way the temperature inside the induction motor could be read directly from the converter's display.

The temperature values were taken from 5 to 5 minutes. The temperature curves of the motor were plotted for different loads and speeds.

In figures 5 and 6 the temperature curves obtained for 50%, respectively 100% of the rated load are given. These curves were plotted for three feeding frequencies: 6 Hz, 25 Hz and 50 Hz. For comparison purposes in both figures the temperature curve for no-load condition is also plotted.

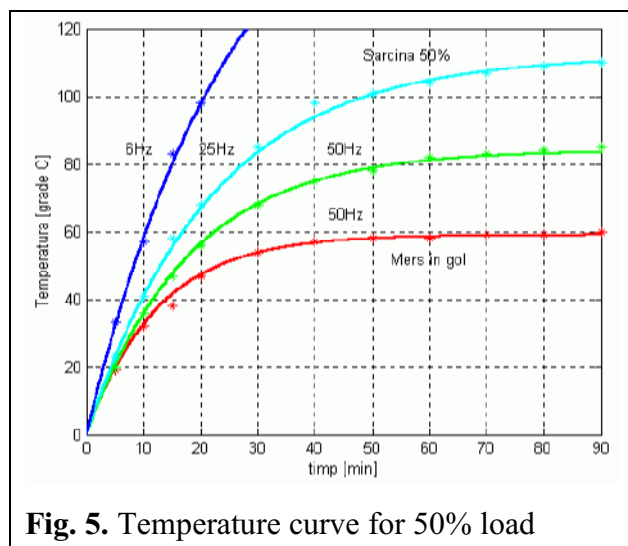

**Fig. 5.** Temperature curve for 50% load

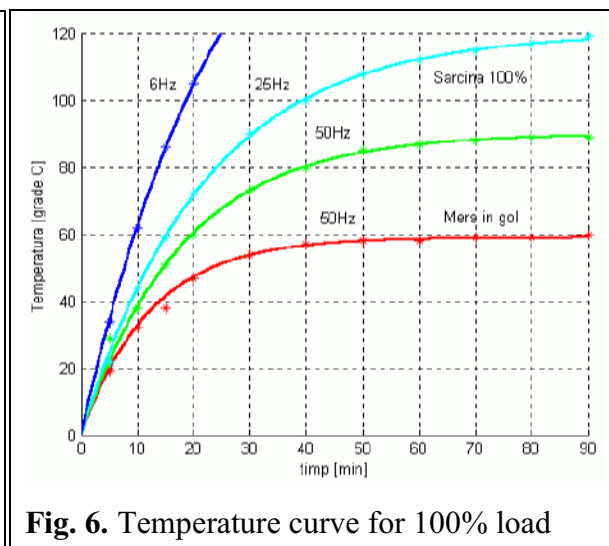

**Fig. 6.** Temperature curve for 100% load

As it can be seen from all the presented results the compact variable speed drive system designed and built up fulfils all the general requirements.

## 5. ACKNOWLEDGEMENT

This research was made possible by funding of the Romanian National Ministry of Education, the Managerial Agency for Scientific Research, Innovation and Technological Transfer (AMCSIT-POLITEHNICA), grant no. 1104/2001.

## 6. REFERENCES

- [1] Murphy, P.E.: **Understanding Variable Speed Drives**, Maintenance Technology, March 1996.
- [2] Redgate, J.S. – Kansara M. – Holmes, P.G.: **Improved Efficiency of Variable Frequency Induction Motor Drives by Voltage Control**, Proceedings of the 9<sup>th</sup> International Conference on Electrical Machines and Drives 1999, pp. 199-202.
- [3] Bartos F.J.: **Combination Motors and Drives Move to Make Their Mark**, Control Engineering, December 2000.
- [4] Bartos F.J.: **Integrated Motor-Drives Seek Wider Market, User Acceptance**, Control Engineering, December 2000.
- [5] Akiyama, Y. – Takaku, K.: **A Study of the Most Suitable Design of Inverter-Driven Induction Motors**, PCIM – Power Conversion & Intelligent Motion, June 1994, pp. 38-44.
- [6] Lipo, T.A. – Wang, F.X.: **Design and Performance of a Converter Optimized AC Machine**, IEEE Transactions on Industrial Applications, Vol. IA-20, No. 4 (July/August 1984), pp. 834-844
- [7] \*\*\*: **Combimaster & Micromaster Integrated**, Reference Manual, SIEMENS, 1999.
- [8] Johnson G.W.: **LabVIEW Graphical Programming**, McGraw-Hill Inc., New York, 1994.
- [9] \*\*\*: **MATLAB – The Language of Technical Computing. Using MATLAB Version 6**, The MathWorks Inc., Natick, 2000.